



MIG250


Feature:

- Rugged, robust, and industrial look with ergonomic design
- **ClearVision** Technology
- **Intelligent synergic control**
- Welding engineer mode
- **Smart Lift TIG**
- Consistent and efficient MIG spot welding performance
- Flexible remote control solutions
- Quick factory reset; auto sleep mode
- Compatible with MIG digital torch and spool gun
- LED inside wire feeder cabinet; handy accessory storage slot
- **ABAP: Active Balancing Air Passage**
- On demand fan
- Voltage Reduction Device (VRD)
- Key power electronic component protection
- Overcurrent and overheat protection



Specification:

		MIG250 N2S82
Input power		AC230 V ±15%, 50/60 Hz
Open circuit voltage		60 V
MIG	Rated input current	46.3 A
	Rated input power capacity	10.51 kVA
	Output current range	30~250 A
	Rated duty cycle	30%
	Wire feed speed	2~18 m/min
MMA	Wire spool size	D300
	Rated input current	41.3 A
	Rated input power capacity	10.16 kVA
	Output current range	20~220 A
TIG	Rated duty cycle	30%
	Rated input current	33.5 A
	Rated input power capacity	9.08 kVA
Output current range		5~250 A
Rated duty cycle		30%
Efficiency		85.7%
Power factor		0.73
Idle state power		<50 W
Protection class		IP23S
Insulation class		H
Dimensions L×W×H		700×280×511 mm
Net weight		23.5 kg

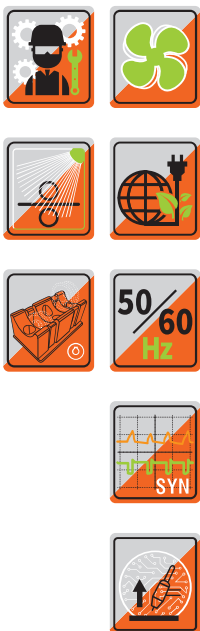

Standard Accessories

- 3M MB-24
- 3M earch clamp
- 1 pc quick socket
- 2 pcs hose clamps